


Part No : GM-0.5U1924PC6A-UTPPP-SH

FEATURES:

- Meets ANSI/TIA -568-C.2 category 6A, ISO/IEC11801 and EN50173-1 specification
- IDC connector can accept 22-26 AWG solid and stranded cables
- Supports T568 A&B wiring & easy installation
- Terminate using 110 or Krone tools
- Panel material: SECC/1.5mm thickness
- Build in with Shutter
- 0.5U click on management bar
- Rosh compliant

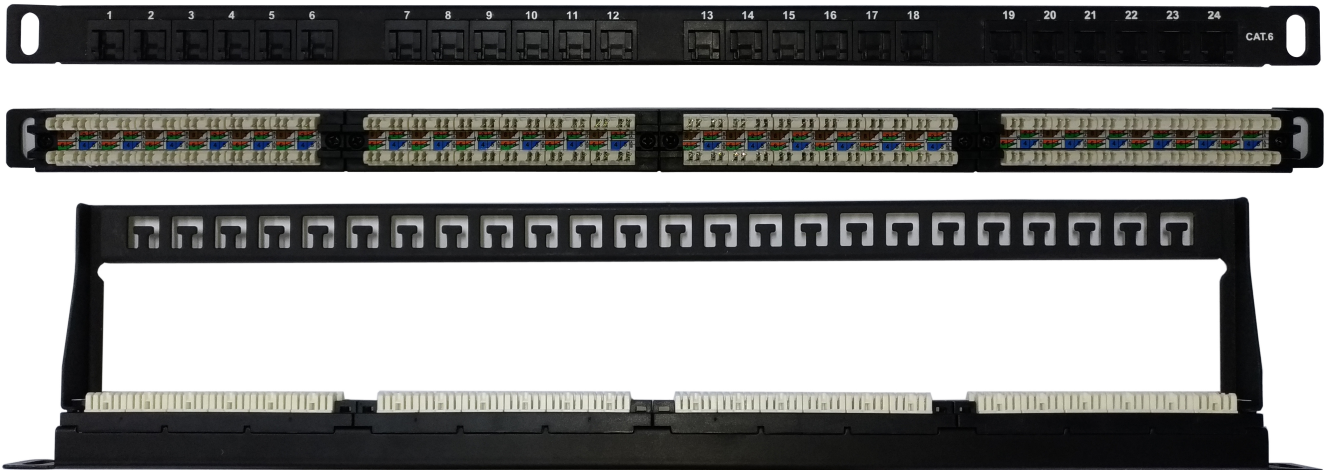

CHARACTERISTICS:

IDC Connector:

Item	Material or Feature
Operating life	Minimum 250 Re-terminations
Contact Material	Phosphor bronze
IDC Contact Plating	Tin plated over Nickel
IDC Plastic Housing	PC

Jack Connector:

Item	Material or Feature
Operating life	Minimum 750 insertions
Contact Material	Phosphor bronze
Jack Contact Plating	50 μ inch thickness gold over Nickel
Jack Plastic Housing	Glass filled polyester

APPLICATIONS:

- 10GBASE-T Ethernet, 1000BASE-Tx Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-Tx Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications

TYPICAL PERFORMANCE:

EN50173 PL2 Class Ea

