



GM-1U1924PPPE-S_V2

Giga-Maxx 19" 1U Shielded Patch Panel with back bar and Labeling Holder
24 Port Empty

▶ Features

- ▶ Provide more flexibilities for customize installation
- ▶ Used for both UTP&STP
- ▶ High density SPCC material, effectively guarantee the mechanical strength
- ▶ Oversize labeling window for easy identification

▶ Material







- ▶ Panel : SPCC
- ▶ Wire management : SPCC
- ▶ Plastic part : ABS UL94V-0

▶ General

- ▶ Operating temperature range : -10°C to 60°C
- ▶ Storage temperature range : -40°C to 68°C
- ▶ Humidity : 10% ~ 90% RH



1 2 3 4 5 6

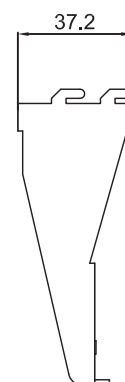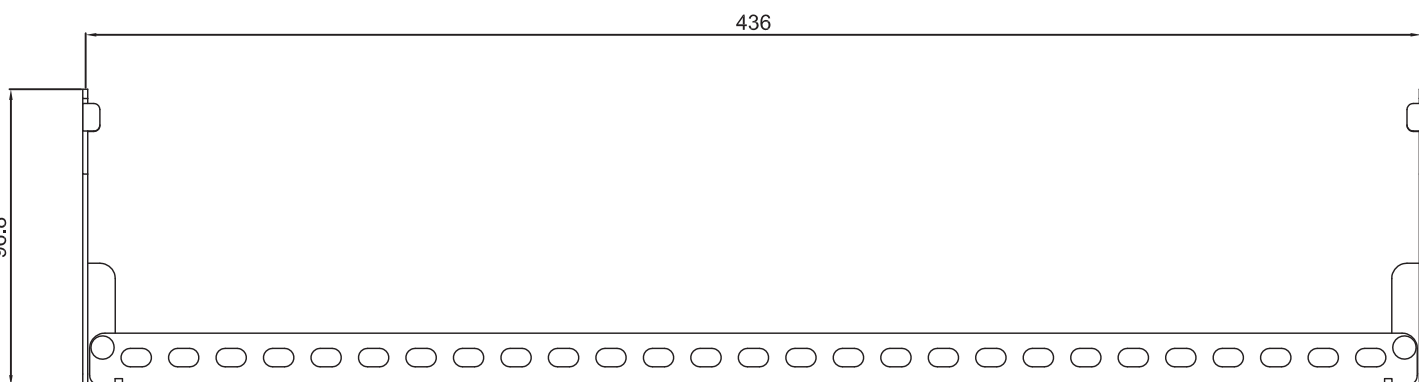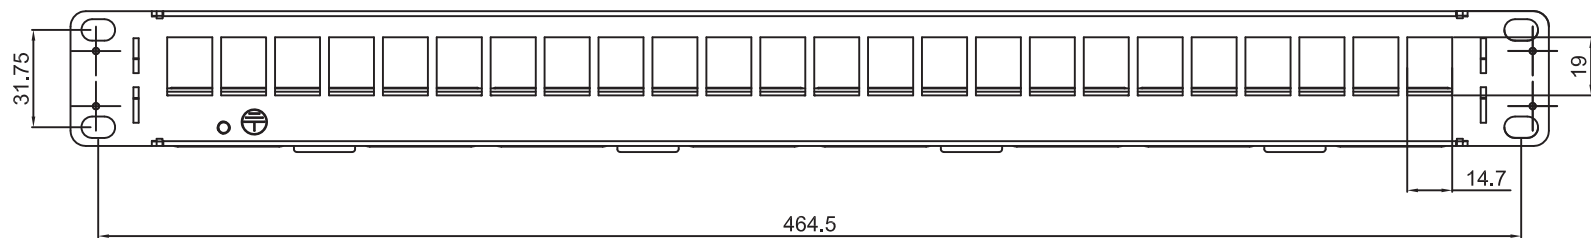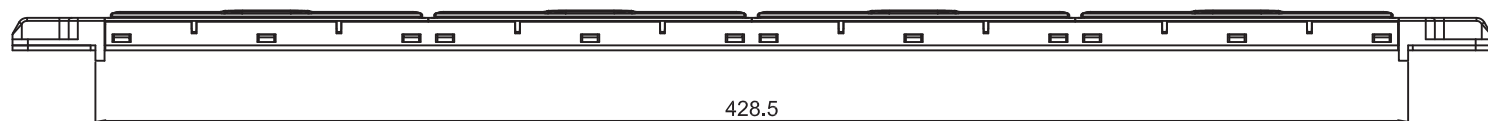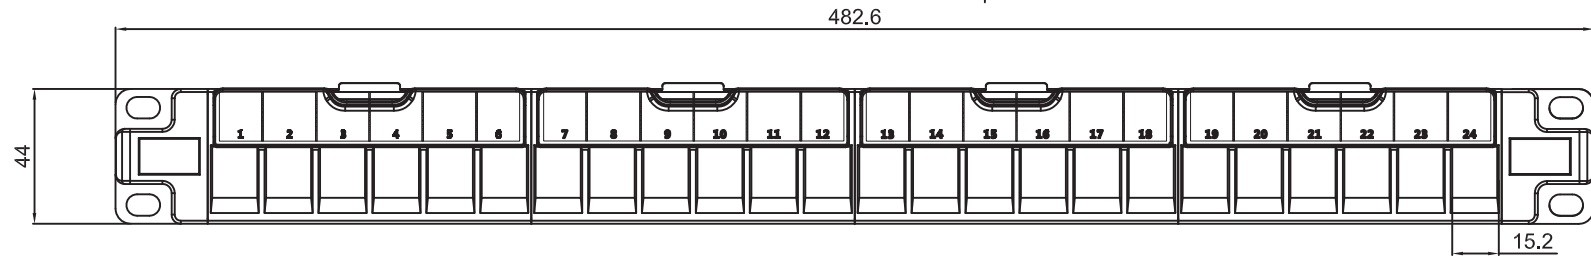

Material
 PANEL: SPCC, On the surface of bright nickel plating
 Physical Characteristics
 Bracket: SPCC, the surface is black
 Operating Temperature Range: -10°C to 60°C
 Storage Temperature Range: -40°C to 68°C
 Humidity: 10%~90%RH

ASSY	SPEC	QTY	Scale	2:5			
Tray	443*92*37mm	1	3rd Angle Projection				
Cable ties	3*100mm	24					
Screw	M6*12mm	4	Unit	mm			
Screw	M4*5, 7mm	1	Date	2017-04-12			
Earth wire	12AWG*20cm	1	Tolerance				
			~20	~50	~150	150~	ANGLE
			±0.2	±0.4	±0.5	±1.5	±2°

All Copy Rights Reserved	
<i>Giga-Maxx</i>	
Title	
GM-1U1924PPPE-S_V2	
Drawn by	Checked by
WLL	

1 2 3 ±0.2 ±0.4 ±0.5 ±1.5 ±2°