


19.2


448

13

3.3

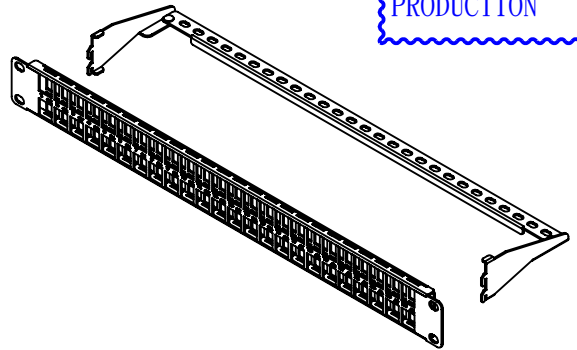

PRODUCTION

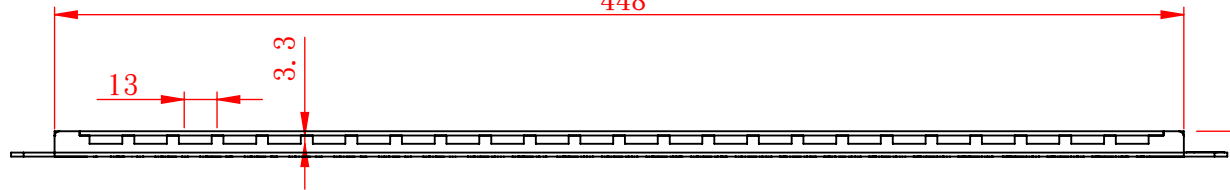


1.6
10

A

A

B

B

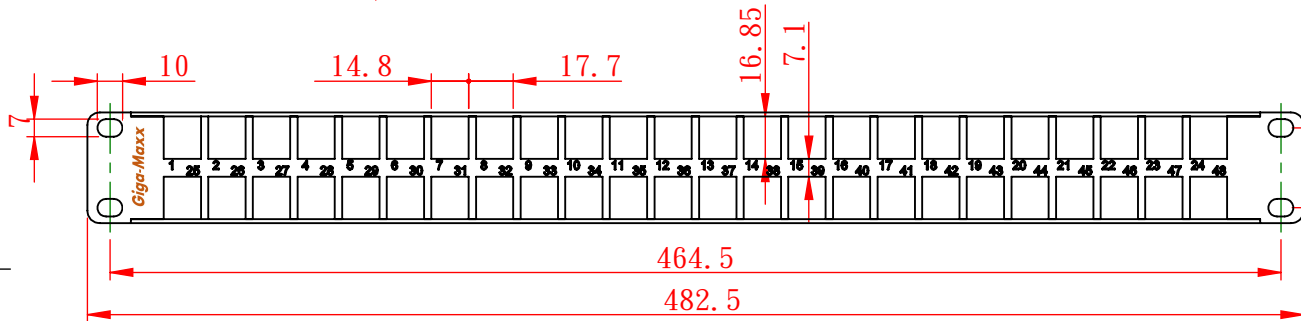

10

14.8

17.7

16.85

7.1

31.7

44


464.5

482.5



C

C

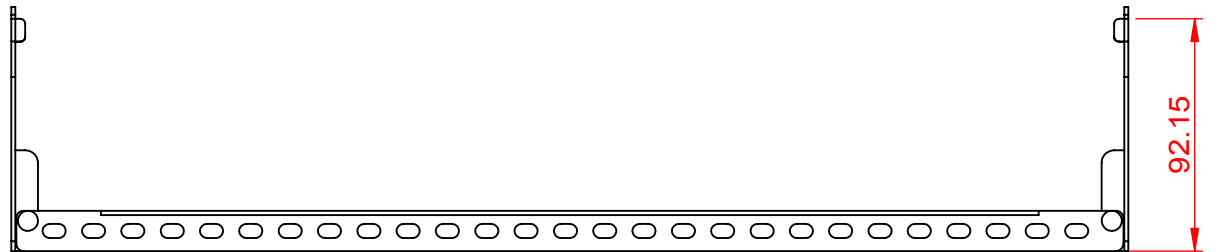

92.15

WIRE MANAGEMENT

ENCLOSURE
WIRE MANAGEMENT X 1 PC
INSTRUCTION X 1 PC



NOTES:

- MATERIAL: ST-12 T=1.6mm AFTER POWDER COATING
- BODY COLOR: BLACK

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.
HUMIDITY : 10%-90%RH.

D

Scale		1:3				
3rd Angle Projection					Giga-Maxx	
Unit		mm			Title GM-1U1948PPE	
Date		2018/12/1			Giga-Maxx 19" 1U UTP Patch Panel with back bar 48 Port Empty	
Tolerance						
~20	~50	~150	150~	ANGLE	Drawn by	
±0.2	±0.4	±0.5	±1.5	±2°	Shuen	
					Checked by	

1

2

3