

## **Application:**


- Optical Access Network (OAN)
- Data processing centers
- Cable television (CATV)
- local area network (LAN)
- Coarse Wavelength Division Multiplexer (CWDM)



2U 24 SC Duplex F.O. Panel

## **Features:**

- Consist of sliding shelves, easy to operate and maintain
- Fit for 19" rack
- Suitable for SC、LC、FC、ST, etc.

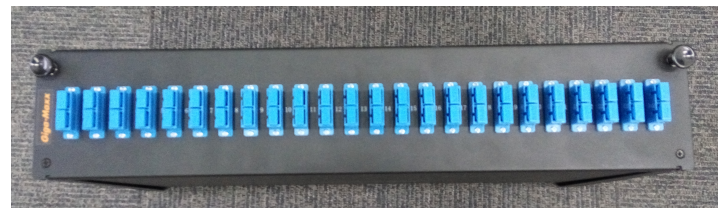

2U 24 SC Duplex Panel

## **Description:**

The case is made of cold rolled steel sheet, electrostatic spraying, provide 48&96 single and double adapter, available for SC Duplex or Simplex/LC Duplex/FC/ST.

## **Performance:**

### **Operating condition**

- Operating temperature:  $-25^{\circ}\text{C} \sim +40^{\circ}\text{C}$
- Storage temperature:  $-25^{\circ}\text{C} \sim +55^{\circ}\text{C}$
- Relative humidity:  $\leq 85\%$  ( $+30^{\circ}\text{C}$ )
- Air pressure: 70Kpa  $\sim$  106Kpa
- Color: Black

## **Dimension:**

Model	Dimension (WxDxH)
GM-2U FOPP48-BL	483mm×265mm×2U