



Giga-Maxx

GM-CAT6KSJ180-WH





Top



Right



Front

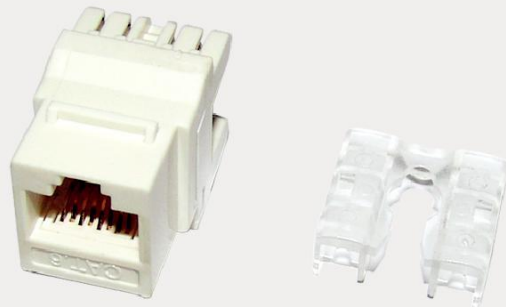

Giga-Maxx Cat 6 180° UTP Keystone Jack, White

Features:

- conform to TIA/EIA-568C.2, ISO/IEC 11801 and EN50173-1 category 6 specifications
- supports T568 A&B wiring & easy installation
- 110 IDC connector can accept 22-26 AWG solid cables
- termination by 110 or dual tools
- RoHS compliant

Characteristics:

Dielectric Strength	1000V RMS for 1min
Current Rating	1.5Amp Max.
Insulation Resistance	10MΩ Min.
Contact Resistance	2mΩ per contact
Temperature Range	-10° to 60° C
Material Flame Rating	UL94 V-0
IDC Contacts	8pin contact in PCB
250 re-terminations	Jack Phosphor bronze, 50μ inch gold plated over nickel in contact area, Operating life: Minimum 750 insertions Operating life: Minimum