



Description:

The 900 um tight buffer fibers are distributed in the center of the cable. The aramid yarn as strength member surround the fibers, the cable is completed with a LSZH.

Features:


- Small outer diameter, light weight, easy to strip
- Good flexibility performance
- Jacket color, SM cable in yellow, MM cable in orange, OM3 cable in aqua

Compliances:

- ITU-T G₆₅₁, ITU-T G_{652D} OM₃, OM₄
- ICEA-596
- ANSI/TIA 568-B.3
- IEC 794
- IEC-60332
- RoHS

Applications:

- Used in premise backbone cabling fiber optic cable
- 900um tight buffer fiber suits for termination with connectors work as patch cord or pigtails

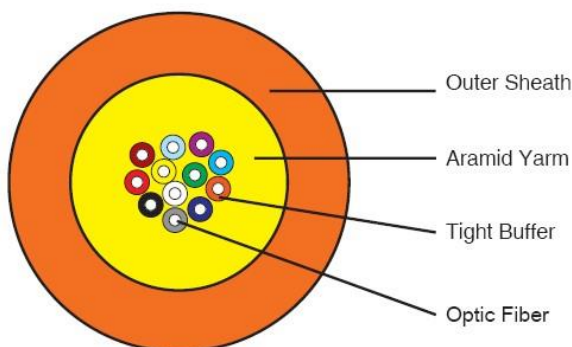

Indoor Fiber Optic Cable Tight Buffer with Aramid Yarn Strength, LSZH

Giga-Maxx

Environmental Characteristics:

Tight Buffer	Material	LSZH
Peripheral Strength Member	Material	Aramid Yarn
Sheath	Material	LSZH
	Color	Yellow, Orange, Aqua
Operating Temperature	-20°C to +60°C	
Storage / Transport Temperature	-20°C to +60°C	
Installation Temperature	-5°C to +50°C	

Mechanical Characteristics:

Fiber count	Outer diameter (mm)	Nominal cable weight (kg/km)	Crush Resistance N/100mm	Tensile load		Bend radius	
				Short term (N)	Long term (N)	Static (mm)	Dynamic (mm)
2	3.2 ± 0.25	10	1000	660	200	10D	20D
4	4.8 ± 0.25	18	1000	660	200	10D	20D
6	5.1 ± 0.25	22.5	1000	660	200	10D	20D
8	5.6 ± 0.25	28	1000	660	200	10D	20D
12	6.2 ± 0.25	38	1000	660	200	10D	20D
24	8.2 ± 0.25	63	1000	660	200	10D	20D

Note: "D" is cable diameter

Fiber Color Code:

No. of fiber	1	2	3	4	5	6
Color of fiber	Blue	Orange	Green	Brown	Grey	White
No. of fiber	7	8	9	10	11	12
Color of fiber	Red	Black	Yellow	Violet	Pink	Aqua
No. of fiber	13	14	15	16	17	18
Color of fiber	Blue/ Black Tracer	Orange/ Black Tracer	Green/ Black Tracer	Brown/ Black Tracer	Grey/ Black Tracer	White/ Black Tracer
No. of fiber	19	20	21	22	23	24
Color of fiber	Red/ Black Tracer	Black/ White Tracer	Yellow/ Black Tracer	Violet/ Black Tracer	Pink/ Black Tracer	Aqua/ Black Tracer

Optical Performance:

	Wavelength	9/125 μm	50/125 μm	62.5/125 μm	50/125μm(OM3)	50/125μm(OM4)
Max. Attenuation dB/km	850 / 1300nm	--	≤ 3.2 / ≤ 1.2	≤ 3.2 / ≤ 1.2	≤ 3.2 / ≤ 1.2	≤ 3.2 / ≤ 1.2
	1310 /1550nm	≤ 0.36 / ≤ 0.22	--	--	--	--
Minimum Bandwidth MHz· km	850 / 1300nm	--	500 / 500	200 / 500	1500 / 500@LED	3500 / 500@LED
					2000 / 500@Laser	4700 / 500@Laser

Other performance data available upon request.

Ordering information:

Part NO. GM-INDOOR -XYZZZ

Description Giga-Maxx fiber optic indoor distribution cable tight buffer with aramid yarn strength member LSZH

X : Mode 1: OM₁ 62.5/125 2: SM 9/125 3: OM₂ 50/125 4: OM₃ 50/125 5: OM₄ Y: outer sheath

1:LSOH

ZZZ: fiber count 002 / 004 / 006 / 008 / 012 / 024

Packing Information:

1. Standard drum length is 1000m ±1%
2. Covered by plastic buffer sheet
3. Sealed by strong wooden battens
4. At least 1.1m of inner end of cable should be reserved for testing
5. Cable fully tested before shipment